


# Mechanical Hygrostat


## **EHGT**







#### Connection diagrams





Filter fan, Cooling equipment, Signal device

### • Adjustable relative humidity

- Change-over contact
- High switching capacity
- Easily accessible terminals
- Clip fixing


The electromechanical hygrostat is designed to control enclosure heaters so that the dew point is raised when a critical relative humidity of 65% is exceeded. In this way condensation and corrosion in enclosures with electric/electronic components is effectively prevented.

### **Technical Data**

| EHGT                           |  |  |
|--------------------------------|--|--|
| Operating Voltage              | All AC/DC Voltage  |  |
| Switch difference <sup>1</sup> | +/-5% RH   |  |
| Permissible air velocity       | 15m/sec.   |  |
| Contact type                   | change-over contact  |  |
| Service life                   | >50,000 cycles   |  |
| Min. switching capacity        | 20VAC / DC 100mA   |  |
| Max. switching capacity        | 250VAC, 5A / DC 20W  |  |
| Connection                     | 3-pole terminal for 2.5mm², clamping torque 0.5Nm max.: rigid wire 2.5mm² (AWG 14); stranded wire² 1.5mm² (AWG 16) |  |
| Mounting                       | clip for 35mm DIN rail, EN 60715   |  |
| Casing                         | plastic according to UL94 V-0, light grey  |  |
| Dimensions                     | 67×50×38mm   |  |
| Weight                         | approx. 60g  |  |
| Fitting position               | variable   |  |
| Operating/Storage temperature  | 0 to +60°C (+32 to +140°F) / -40 to +60°C (-40 to +140°F)  |  |
| Operating/Storage humidity     | max. 95% RH (non-condensing)   |  |
| Protection type                | IP20   |  |

<sup>1</sup> at 50% RH

#### Examples of connection

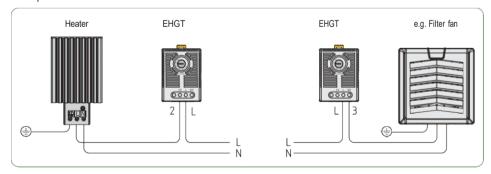

| Art. No. | ting Range | Operating Voltage |
|----------|------------|-------------------|
| 1        | to 95% RH  | 20VAC/DC, 250VAC  |

<sup>&</sup>lt;sup>2</sup> When connecting with stranded wires, wire end ferrules must be used.