



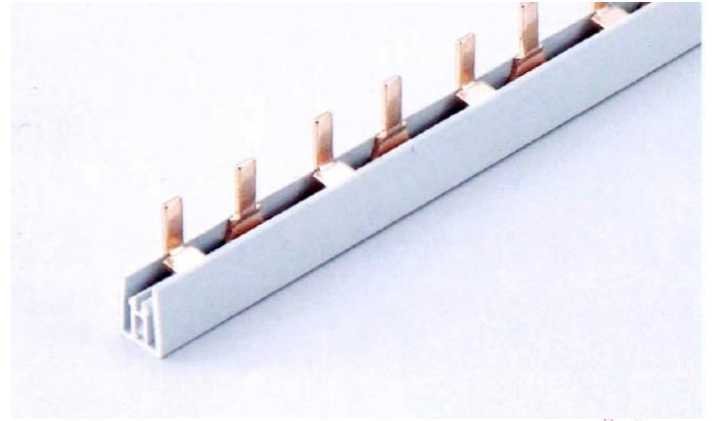


BUS BAR PIN TYPE

Material: Copper


Features: Good Conductivity, low contact resistance, safe and reliable

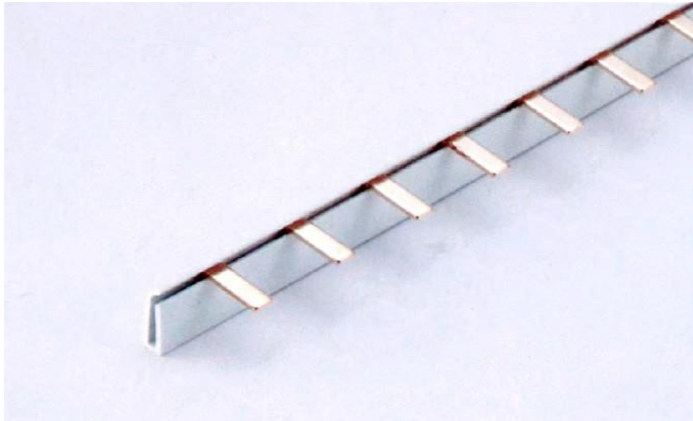

PIN-1P


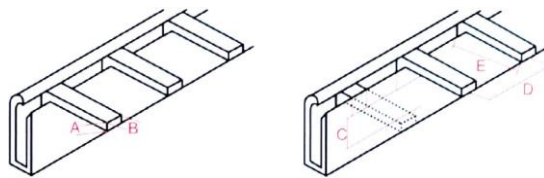


PIN -2P

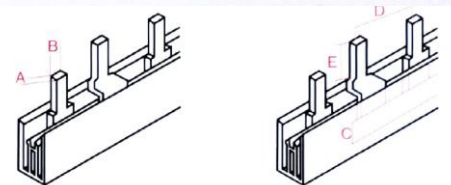


Specification	Model	A	B	C	D	E	Cross- Sectional Area	Reference Current
PIN	1P	1.5	4	9	17.8	11.5	13mm ²	63A
PIN	1P	1.8	4	9	17.8	11.5	16mm ²	100A


Specification	Model	A	B	C	D	E	Cross- Sectional Area	Reference Current
PIN	2P	1.5	4	9	17.8	11.5	13mm ²	63A
PIN	2P	1.8	4	9	17.8	11.5	16mm ²	100A

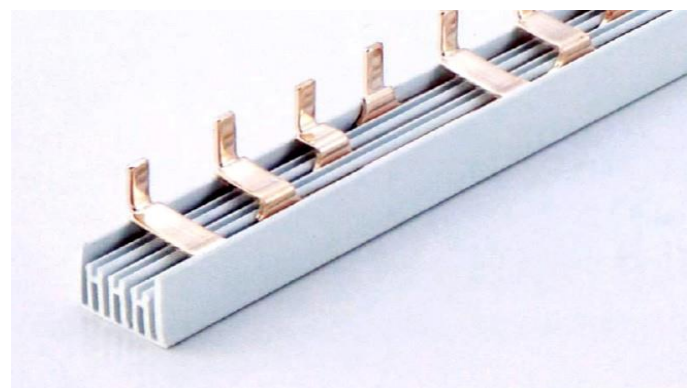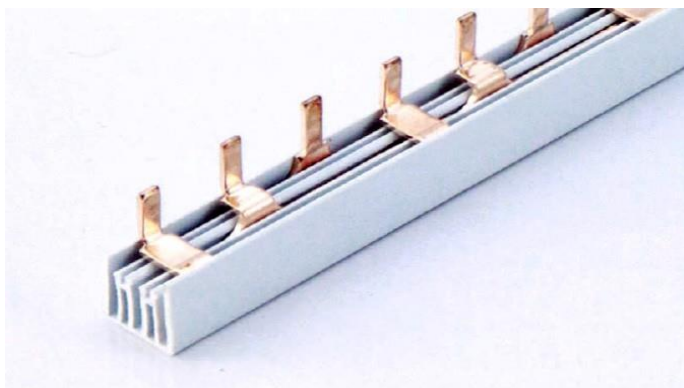

PIN -3P

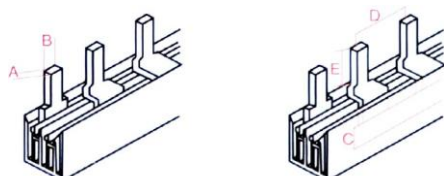

PIN -4P

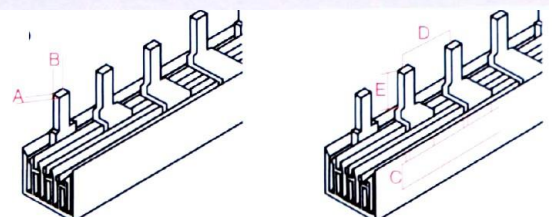

Specification	Model	A	B	C	D	E	Cross- Sectional Area	Reference Current
PIN	3P	1.5	4	9	17.8	11.5	13mm ²	63A
PIN	3P	1.8	4	9	17.8	11.5	16mm ²	100A





Specification	Model	A	B	C	D	E	Cross- Sectional Area	Reference Current
PIN	4P	1.5	4	9	17.8	11.5	13mm ²	63A
PIN	4P	1.8	4	9	17.8	11.5	16mm ²	100A



BUS BAR U TYPE



Material: Copper

Features: Good Conductivity, low contact resistance, safe and reliable

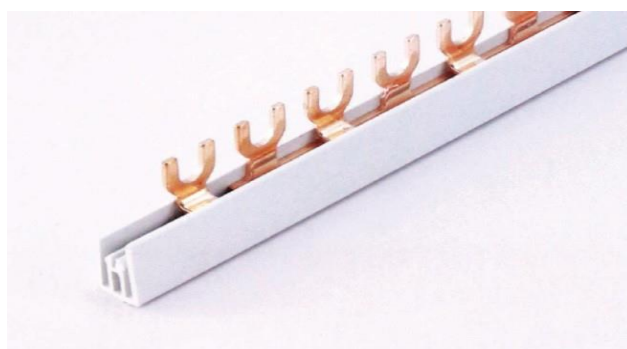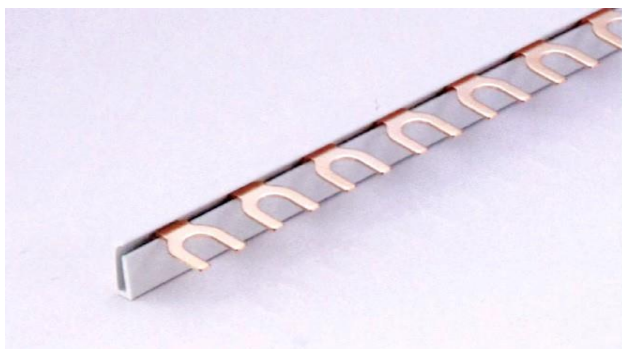





FORK -1P

Specification	Model	A	B	C	D	E	Cross- Sectional Area	Reference Current
FORK	1P	1.5	17.8	9	12	6	13mm ²	63A
FORK	1P	1.8	17.8	9	12	6	16mm ²	100A





FORK -2P

Specification	Model	A	B	C	D	E	Cross- Sectional Area	Reference Current
FORK	2P	1.5	17.8	9	12	6	13mm ²	63A
FORK	2P	1.8	17.8	9	12	6	16mm ²	100A

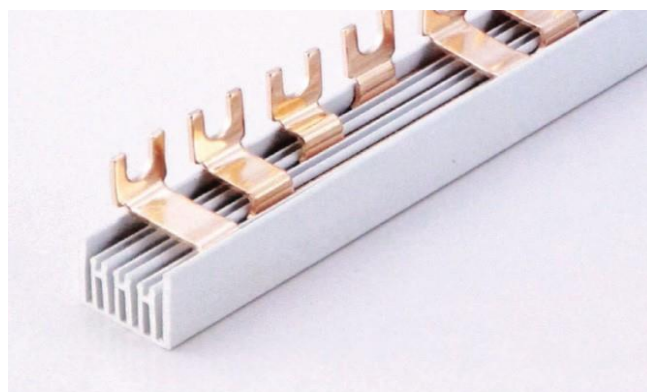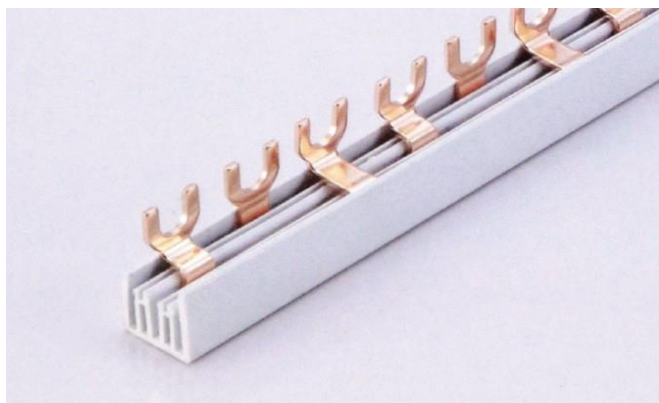

FORK -3P

Specification	Model	A	B	C	D	E	Cross- Sectional Area	Reference Current
FORK	3P	1.5	17.8	9	12	6	13mm ²	63A
FORK	3P	1.8	17.8	9	12	6	16mm ²	100A



FORK -4P

Specification	Model	A	B	C	D	E	Cross- Sectional Area	Reference Current
FORK	4P	1.5	17.8	9	12	6	13mm ²	63A
FORK	4P	1.8	17.8	9	12	6	16mm ²	100A