

Features:

- ◆ True RMS Measurement
- ◆ Scale Interchangeability
- ◆ Non Linear Scale
- ◆ Knife Edge Pointer
- ◆ Grey Lexan Housing



Specifications

Scale and Pointer	
Pointer	Knife - edge pointer
Pointer deflection	0 to 90°
Scale characteristics	Non Linear
Scale division	Coarse - fine
Pointer length	61mm 97mm
Scale Interchangeability	Interchangeable

Electrical Specification


Measured quantity	Power Factor
Overload capacity	(acc. to IS: 1248 / IEC 51 / DIN EN 6001)
Continuously	1.2 times rated Current
Short duration	10 times of rated current upto max 5 sec
Power Consumption	≤1.0 VA
Frequency	50 - 60 Hz
Accuracy	Class 1.5
Over Range	6 times nominal current (for suppress scale)
Dielectric test	2 kV AC for 1 Minute

Certifications

CE RoHS



Dimensions

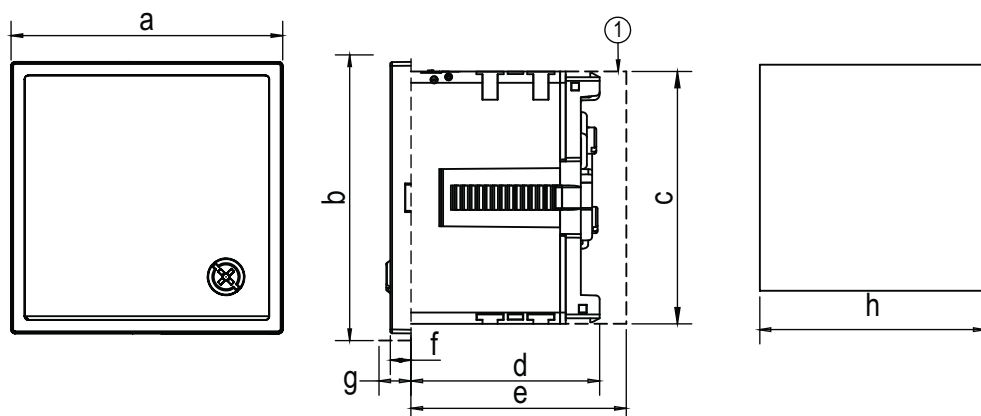

Product	72x72	96x96
Dimensions (in mm)		
a	72	96
b	74.50	98.50
c	67	90.50
d	50	50
e	60	60
f	5.50	5.50
g	8	8
h	68	92